



Dear Parents

Thank you for choosing a Roma Travel System.

The Roma Bambino combines modern swivel wheels with a traditional sprung chassis. The safety of your child is our main priority, therefore please carefully read this manual before use and for the ongoing maintenance of your pram.

Warnings and notes

Before using the stroller, please read the following instructions carefully and keep for future reference. Always use the stroller in accordance with the instructions, or your child's safety may be compromised.

The Bambino stroller is designed to carry one child whose weight does not exceed 15 kg. The maximum load the shopping basket can hold is 4 kg.

WARNING: Never leave your child unattended.

WARNING: Use the stroller harness when your child begins to sit unaided.

WARNING: Make sure before use that the chassis has been properly assembled.

WARNING: Always use the crotch strap in combination with the waist belt.

WARNING: Always use the system fasteners.

WARNING: Any load on the handle affects the stability of the stroller. The changing bag on the handle of the stroller must not exceed 1.5 kg.

WARNING: This product is not suitable for running or skating.

WARNING: Check that the carrycot or seat or car seat is properly attached before use.

WARNING: Do not use a mattress that is thicker than 8 mm.

WARNING: Bear in mind that small parts, such as axle caps protecting the chassis during transport, can be swallowed by a child and may lead to suffocation.

WARNING: Do not allow your child to play with this product.

WARNING: The brake should always be applied when moving the baby to and from the stroller.

WARNING: Only use spare parts supplied or recommended by Roma Prams.

WARNING: Keep the plastic packaging away from the baby to avoid danger of suffocation.

1. Unpacking

Unbox the stroller, carrycot, car seat and all other components out of the box and remove the plastic packaging. It is advisable to keep the packaging for the length of the warranty period.

2. Unfolding the chassis

Pull the safety lock of the chassis and hold down the brake axle with your foot while lifting the handle up. You will hear a click when the chassis is locked into position.



3. Folding the chassis

Remove the top component of the system (seat unit, carrycot or car seat). Push the red button on the right hand side with your thumb whilst pulling up the folding hooks on either side towards the handle. Lower the handle to the floor until the safety lock clicks into place.



4. Installing / Removing Rear Wheels

Press the button in the center of the wheel, then slide the axle into the wheel. Press the red button on the brake bar and insert the wheel with the axle attached. To do the same, follow the same procedure in reverse.



5. Front Wheel Installation / Removal

Slide the wheel axle into the mounting bracket until the wheel clicks into place. To remove the wheel, press the button marked with the arrow and hold it then slide the wheel out of place.




6. Front wheel lock

To lock or unlock the front wheels to the fixed position, slide both red levers in the picture below. We recommend locking the wheels for all-terrain purposes.



7. Using the brake

To use the brake, press down on the center of the rear axle. To unlock, press down on the smaller tab at the top of the brake.

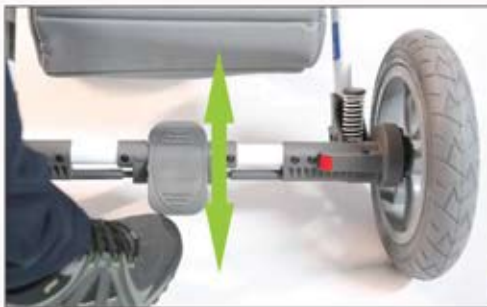

8. Adjusting the height of the handle position

Press and hold both buttons on the outside of the handle and change its position to the desired height.



9. Folding / unfolding the carrycot hood

The hood is installed by pulling it into position. It folds by pushing both buttons on either side of the hood.



10. Installing the carrycot

To set up the carrycot, slide the two metal supports inside the carrycot right and left until they click into place.

To access the support bars, you may need to remove the carrycot lining. Please ensure the carrycot is not used whilst in storage mode.



Install the carrycot by placing the fixings in the appropriate position in the chassis, then gently press the carrycot until the lock is engaged.



To remove the carrycot, press the button in the carrycot shown on the picture to release the lock. Then remove the carrycot from the chassis.



11. Adjusting the carrycot backrest

Pull out the outer lever to change the backrest position and start twirling to raise or lower the backrest. When the adjustment is completed, slide the lever back into place.



12. Installing the seat unit

To install the seat unit to the chassis, use the same instructions as the installation of the carrycot on the previous page.



13. Adjust the backrest of the stroller

To raise the backrest of the stroller push the back of the seat to the correct height. The backrest has an automatic lock.

To recline the seat unit, pull the bar behind the backrest upwards and lower the backrest to reach the desired height and then release the bar to lock into place.



14. Adjust the footrest of the stroller

To lift the footrest of the stroller, push it upwards to obtain the desired height. The footrest has an automatic lock.

To lower the footrest press the two buttons on either side and set it to the desired height, then release the buttons.



15. Folding / unfolding the seat unit hood

The hood is installed by pulling it into position.

It folds by pushing both buttons on either side of the hood.



16. Installing the bumper bar

To install the bumper bar, slide the rails into the catches shown in the picture until the locking buttons on both sides lock the bar into place. To remove the bumper bar, press the locking buttons on both sides and slide it out.



17. Installing / removing the car seat adaptors

To install the car seat adaptor on the chassis, simply click the fitting into the mounting brackets on the chassis as per the seat unit and carrycot installation.

To remove the adaptors, press and hold the lock located on the inside of the adaptor and pull to remove it from the chassis.



18. Install / remove the car seat

To install the car seat on the chassis, insert it into the previously installed adaptors, ensuring the adaptors are installed on the correct side of the chassis so that the car seat doesn't tip.

To remove the car seat, push the two buttons on the sides of the seat and slide it out of the adaptors. Ensure the handle is in the upright position for carrying.



Specifications

1. The Roma Bambino stroller is intended for the transport of one child aged 0 to 36 months with a maximum body weight of 15kg.
2. The carrycot is suitable for a child aged 0-6 months or until the child can sit unaided.
3. The total stroller load capacity is 20kg, including 15kg for the child weight and 4kg for the load in the basket.
4. The brake should be installed at any time the stroller is stationary.

Included in the box:

- Chassis
- Seat unit
- Carrycot
- Car seat
- Car seat adaptors
- Changing bag including travel changing mat
- Apron
- Raincover
- Insect net for stroller
- Cup holder
- Hand muffs

Optional: ISOFIX and Belted Car Seat Base

Maintenance recommendations

Roma Prams recommends:

- Regularly lubricate all mechanical components of the frame, with particular emphasis on shock absorbers, springs and axles.
- Do not allow the fabric to get wet. In the event of rain, use the provided raincover and dry all exposed areas to the frame.
- The fabric may fade if left exposed to sunlight for long periods of time.
- Only clean the material by hand using mild detergents
- Before using the stroller, it is advisable to check the technical condition of the stroller for loose screws. In case of other damage, please stop using the stroller and contact the service centre immediately.
- In case of minor scratches on the coating, it is recommended to cover these areas with a transparent lacquer to prevent the damage spreading.
- Clean any dirt or sand from the wheels immediately after use and relubricate the wheel axles.
- Do not overload the stroller changing bag or shopping basket or the fabric may tear.

Roma Prams recommends the use of permanent lubricants and water repellents such as silicone grease. It is recommended to use specialized upholstery cleaner to treat the material. All repair work beyond general maintenance should be carried out by a certified Roma Prams technician.

The manufacturer may not be held liable for product damage or injuries sustained by the incorrect use of the stroller and encourages all customers to comply with the above recommendations.

We hope that the Bambino will meet your expectations as a new parent. If you have any issues in the assembly, use or maintenance of your stroller, please contact us - hello@romaprams.co.uk

Thank you for choosing Roma